



運搬・荷役機械製作供給の旗手！


KS B 6232



제 7666 호

표시허가업체

*You should
demand the best
for your money!*
Chain block from
NAM SUNG have
been brought to a
logical conclusion:

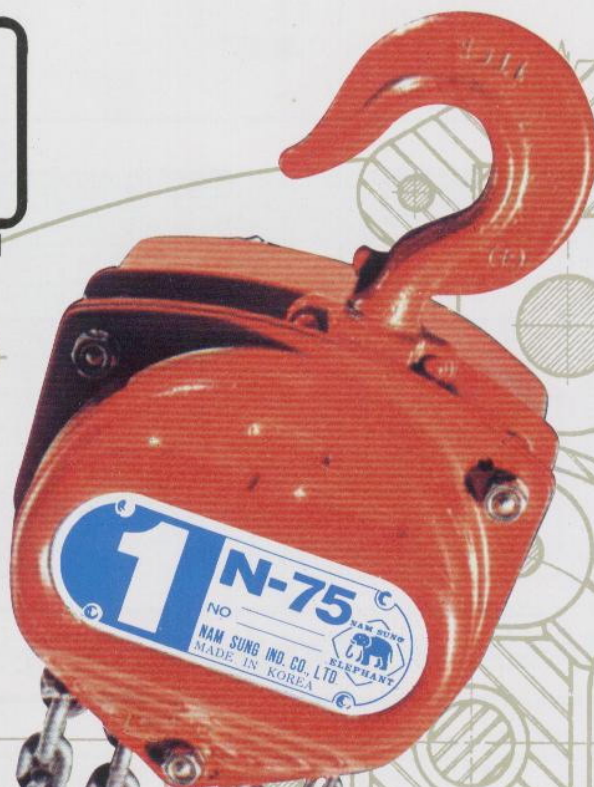

Geared Trolley



Plain Trolley



Electric Chain Hoist


本製品は 五千万圓の 災害賠償責任保険に 加入した 優秀な 製品
イ오니 保険카-드를 確認하여 주시기 바랍니다.

ASK 南星機械産業株式会社


N-75 • CHAIN BLOCK (手動式)

KS B 6232 제 7666 호

● 1 ton ~ 2 ton

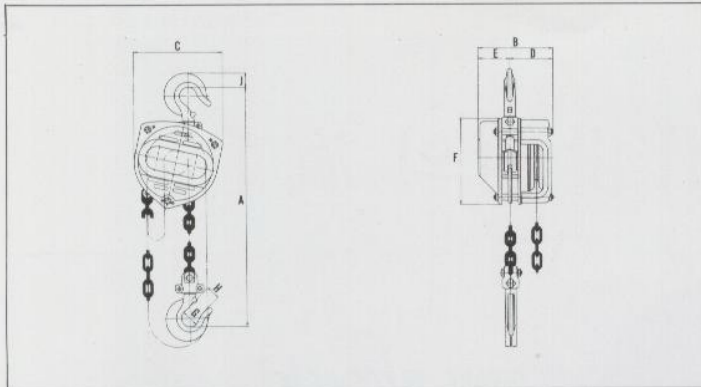

● 3 ton ~ 20 ton

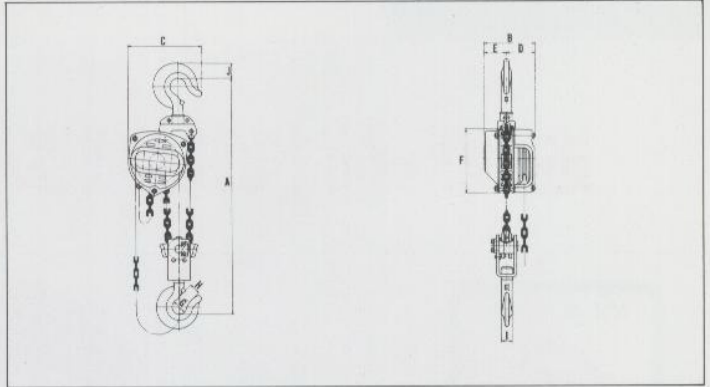


SPECIFICATIONS

Model	Capacity (ton)	Test Load (ton)	Lift (m)	Load Chain		Pulling Efforts(kg)	Dimension										Hand Chain n(m)	Net Weight (kg)
				Dia(mm)	fall		A	B	C	D	E	F	G	H	I	J		
N-75-1	1	1.5	2.5	7.1	1	32	325	152	181	87	65	175	35	26	25	28.5	2.5	13.5
N-75-1.5	1.5	2.25	2.5	7.9	1	37	365	170	200	96	74	201	40	30	28	35	2.5	19.5
N-75-2	2	3.0	3.0	9.5	1	40	415	185	234	103	82	233	44	34	30	39	3.0	28
N-75-3	3	4.5	3.0	7.9	2	40	580	170	259	96	74	202	52	38	34	49	3.0	31.5
N-75-5	5	6.3	3.0	9.5	3	48	680	185	352	103	82	233	65	43	40	51.5	3.0	60
N-75-8	8	10	3.5	9.5	4	52	1000	194	400	126	68	233	77	58	48	64.5	3.5	104
N-75-10	10	12.5	3.5	9.5	5	58	1000	213	400	126	87	233	90	68	58	73	3.5	126
N-75-15	15	20	3.5	9.5	8	61	1250	325	456	232	93	233	100	80	90	97	3.5	290
N-75-20	20	25	3.5	9.5	10	72	1350	388	572	285	103	233	112	90	100	108	3.5	380


• PLAIN TROLLEY

● 0.5 ton ~ 20 ton

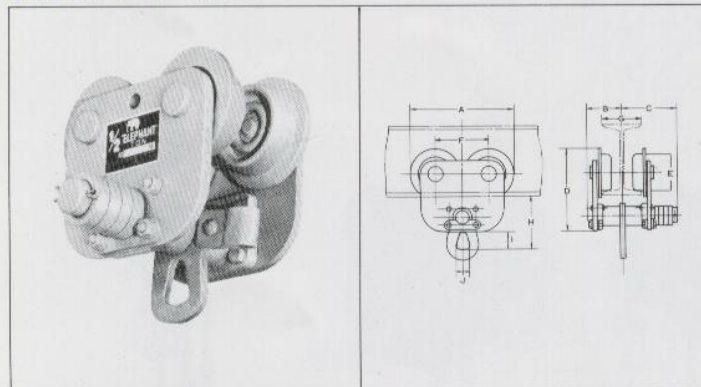

• GEARED TROLLEY

● 0.5 ton ~ 20 ton

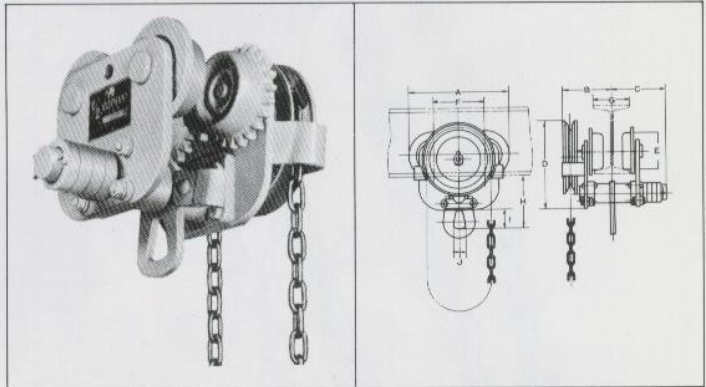

DIMENSIONS (mm)

Model	A	B	C	D	E	F	G	H	I	J
NP - 0.5	208	72.5	122.5	140	60	100	75-125	98.4	40	30
NP - 1	221	72.5	122.5	170	80	116	75-125	106	40	30
NP - 1.5/2	264	90	140	214	100	136	100-150	145	53	40
NP - 3	289	94	144	240	114	150	100-150	166	62	50
NP - 5	328	110	160	279	125	170	125-175	204	70	60
NP - 8	434	187.5	212.5	332	160	220	150-190	228	100	80
NP - 10	434	187.5	212.5	332	160	220	150-190	228	100	80
NP - 15	580	207.5	232.5	463	200	295	150-190	355	155	140
NP - 20	580	207.5	232.5	463	200	295	150-190	355	155	140

(주) B,C의 치수는 G의 값이 최소일 때의 값임.


DIMENSIONS (mm)

Model	A	B	C	D	E	F	G	H	I	J
NG - 0.5	208	146.5/259.5	122.5	140	60	100	75-125	98.4	40	30
NG - 1	221	146.5/259.5	122.5	170	80	116	75-125	105	40	30
NG - 1.5/2	264	161/274	140	214	100	136	100-150	145	53	40
NG - 3	289	161/274	144	240	114	150	100-150	166	62	50
NG - 5	328	176/289	160	279	125	170	125-175	204	70	60
NG - 8	434	295.5/407.5	212.5	332	160	220	150-190	228	100	80
NG - 10	434	295.5/407.5	212.5	332	160	220	150-190	228	100	80
NG - 15	580	300/412	232.5	463	200	295	150-190	355	155	140
NG - 20	580	300/412	232.5	463	200	295	150-190	355	155	140


(주) 1. B에서 /의 앞 뒤 치수는 체인블록용 아래 치수는 호이스트용임
2. B,C의 치수는 G의 값이 최소일 때의 값임.

N-75 • CHAIN BLOCK with PLAIN TROLLEY(結合型)

● 1 ton ~ 2 ton

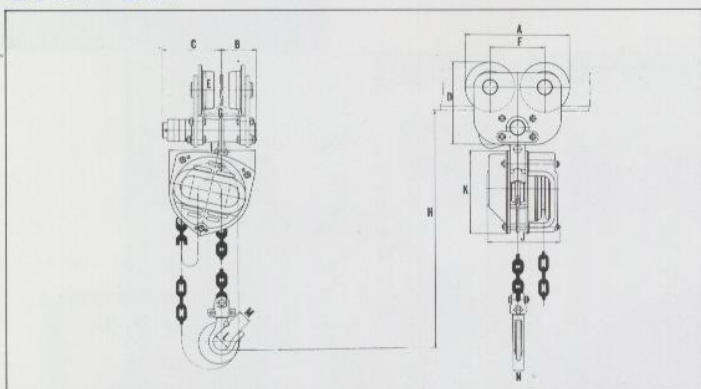

● 3 ton ~ 20 ton

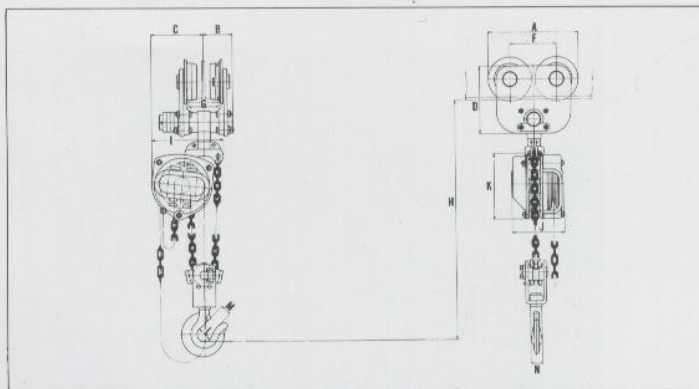


SPECIFICATIONS


Model	Capacity (ton)	Test Load (ton)	Lift (m)	Dimension														Min Radius (mm)	Hand Chain n(m)	Net Weight (kg)
				A	B	C	D	E	F	G	H	I	J	K	L	M	N			
NPC-75-1	1	1.5	2.5	221	72.5	122.5	170	80	116	75-125	330	181	152	175	35	26	25	1100	2.5	25
NPC-75-1.5	1.5	2.25	2.5	264	90	140	214	100	136	75-125	400	200	170	201	40	30	28	1200	2.5	40
NPC-75-2	2	3.0	3.0	264	90	140	214	100	136	100-150	450	234	185	233	44	34	30	1200	3.0	47
NPC-75-3	3	4.5	3.0	289	94	144	240	114	150	100-150	570	232	170	202	52	38	34	1700	3.0	54
NPC-75-5	5	6.3	3.0	328	110	160	279	125	170	125-175	670	340	185	233	65	43	40	2300	3.0	101
NPC-75-8	8	10	3.5	434	187.5	212.5	332	160	220	150-190	800	483	194	233	77	58	48	3000	3.5	175
NPC-75-10	10	12.5	3.5	434	187.5	212.5	332	160	220	150-190	800	483	213	233	90	68	58	3000	3.5	180
NPC-75-15	15	20	3.5	580	207.5	232.5	463	200	295	150-190	1000	606	325	233	100	80	90	6000	3.5	415
NPC-75-20	20	25	3.5	580	207.5	232.5	463	200	295	150-190	1100	686	388	233	112	90	100	6000	3.5	465

N-75 • CHAIN BLOCK with GEARED TROLLEY(結合型)

● 1 ton ~ 2 ton

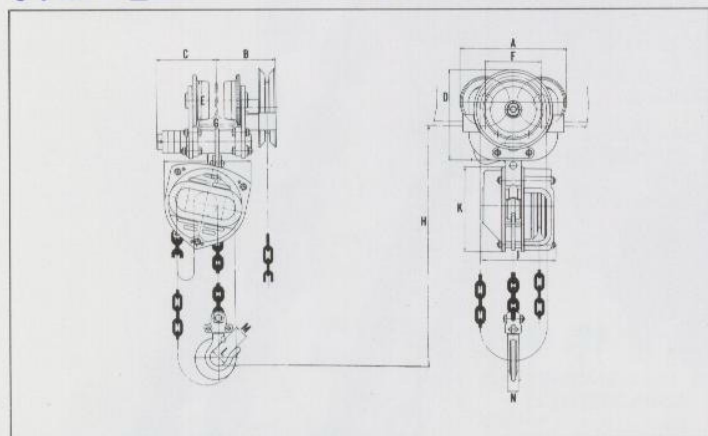

● 3 ton ~ 20 ton

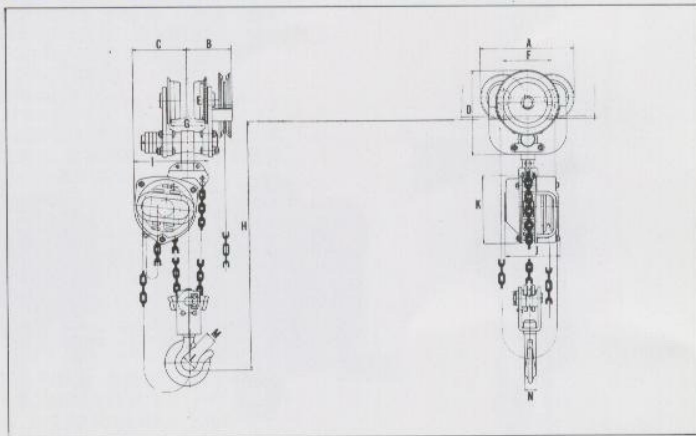


SPECIFICATIONS

Model	Capacity (ton)	Test Load (ton)	Lift (m)	Dimension														Min Radius (mm)	Hand Chain n(m)	Net Weight (kg)
				A	B	C	D	E	F	G	H	I	J	K	L	M	N			
NGC-75-1	1	1.5	2.5	221	146.5	122.5	170	80	116	75-125	330	181	152	175	35	26	25	1100	2.5	27.3
NGC-75-1.5	1.5	2.25	2.5	264	161	140	214	100	136	75-125	400	200	170	201	40	30	28	1200	2.5	43.5
NGC-75-2	2	3.0	3.0	264	161	140	214	100	136	100-150	450	234	185	233	44	34	30	1200	3.0	50
NGC-75-3	3	4.5	3.0	289	161	144	240	114	150	100-150	570	232	170	202	52	38	34	1700	3.0	58.5
NGC-75-5	5	6.3	3.0	328	176	160	279	125	170	125-175	670	340	185	233	65	43	40	2300	3.0	108
NGC-75-8	8	10	3.5	434	295.5	212.5	332	160	220	150-190	800	483	194	233	77	58	48	3000	3.5	190
NGC-75-10	10	12.5	3.5	434	295.5	212.5	332	160	220	150-190	800	483	213	233	90	68	58	3000	3.5	195
NGC-75-15	15	20	3.5	580	300	232.5	463	200	295	150-190	1000	606	325	233	100	80	90	6000	3.5	440
NGC-75-20	20	25	3.5	580	300	232.5	463	200	295	150-190	1100	686	388	233	112	90	100	6000	3.5	490

N-75 分解図

Break-downs

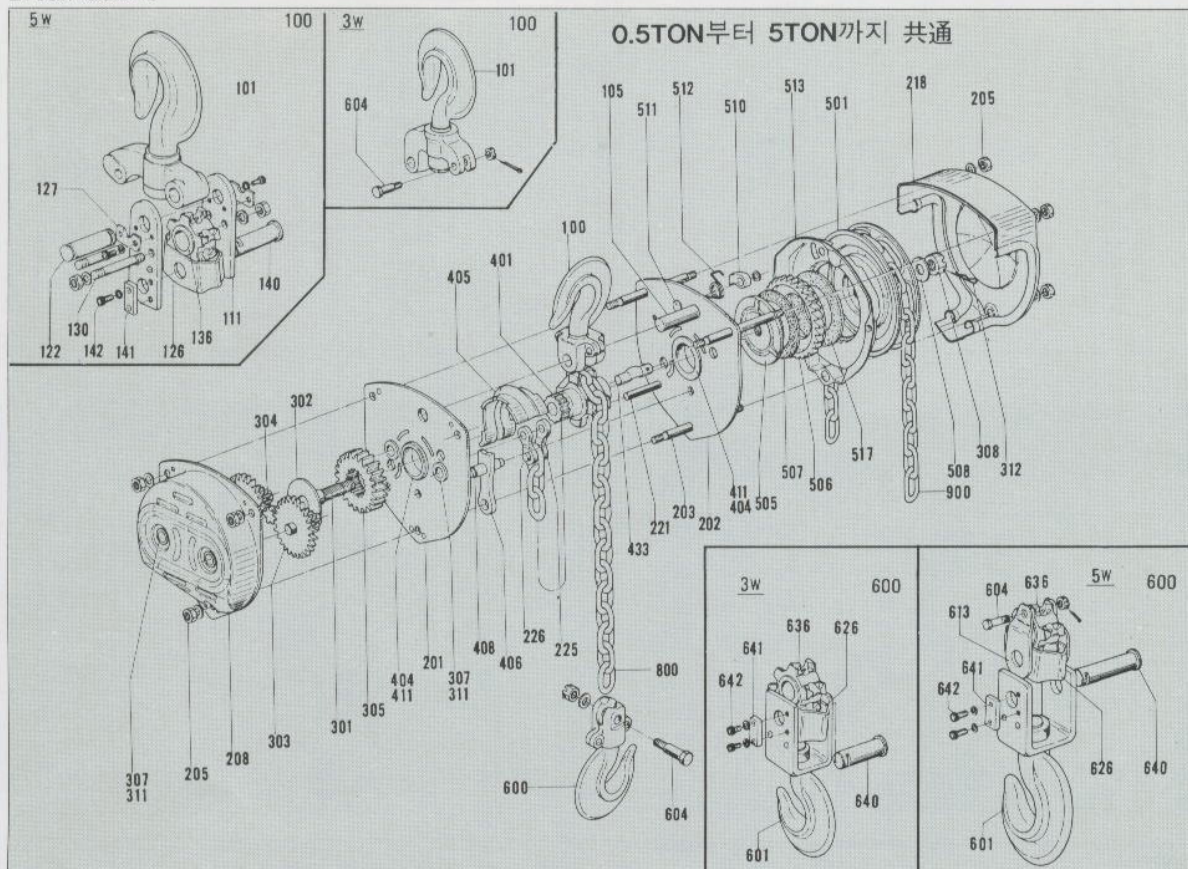

ASK® 南星機械産業株式会社

本社・工場：京畿道 安山市 新吉洞 1054-1(반월공단 B603-1)

TEL：(直)(02)868-5866, (02)868-5867

(代)(0345)491-1327

(0345)491-1328~9

(0345)491-0331

(0345)491-0241

FAX：(代)(0345)495-7081~2

A・S센터：서울特別市 永登浦區 堂山洞2街 30-2

(永登浦流通센터6層 43號)

TEL：(代)(02)2633-4821, (02)2633-4822

(02)2632-2361~5

FAX：(02)676-4795, (02)678-0847

釜山事務所：釜山廣域市 釜山鎮區 田浦1洞 309-21

TEL：(051)807-6660

FAX：(051)806-5574

ISP® 南星精密工業株式会社

係列社

本社・工場：京畿道 始興市 正往洞 1274-6(시화공단 3다 718)

TEL：(0345)499-2721, (0345)499-2722

FAX：(0345)499-2723

IST® 南星貿易産業

本社・工場：京畿道 富川市 吾丁區 三井洞 264-3

TEL：(032)683-7933, (032)683-7934

FAX：(032)683-7935

서울事務所：서울特別市 永登浦區 堂山洞2街 30-2

(永登浦流通센터6層 5號)

TEL：(02)678-0786, (02)678-0787

FAX：(02)678-0847

전국지역 판매센터